


## UV LED TUBE - 400nm Series

### Product Pictures.

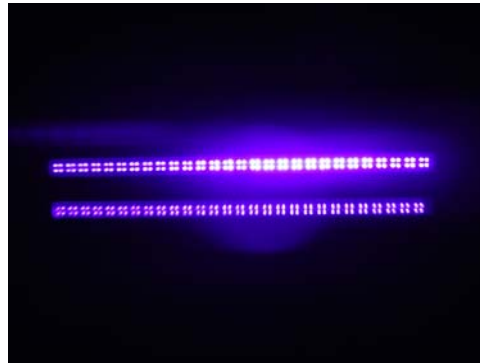

### Product Applications.

UV light source for photocatalyst.  
UV light source for curing.  
Plan grow light for green house.  
Aquarium Lighting.  
Architectural Lighting.  
Industrial emitters  
Phosphors Stimulation

### Product Features.

T8 Package  
UV radiation.  
Working without starter, ballast.  
Directly replace traditional black light fluorescent tubes.  
No flicker. Quick start. Water-resistant. Good color uniformity  
Superior and unique design for perfect optical performance.  
Up to 50% energy saving than conventional mercury lamps.  
Lead-free, mercury-free, environment-friendly.

### Typical Technical Characteristics.

General	Light Color	UV Light Source	Beam Angle	Material of Housing
For all types	Ultra Violet	VioLED 400-5R15	15 degree	UV Resistant Polycarbonate.

General	Operating Temperature	Storage Temperature	Dimensions (Dia. * Length)	Remark
For all types	-20 °C ~ +50 °C	-40 °C ~ +80 °C	1f: 30 * 330mm 2f: 30 * 580mm 4f: 30 * 1200mm	Custom wavelengths are available.

### VioLED International Inc.

4F-2, No.427, Zhongshan N. Rd., Daya Dist., Taichung City 428, Taiwan.  
TEL:886-4-25692507 FAX: 886-4-25691977 <http://www.violed.com.tw>

**Specification & Device Selection Guide.**

**1 Foot T8 UV LED Tube (Cap Base = G13, Color of Housing = White)**

P/N	$\lambda_p$	Input Voltage	Power Cons.	Output Power	LED Q'ty	Weight
400-1FUT-230V	395nm ~ 405nm	AC 230V	3.2W	560mw	56pcs	120g
400-1FUT-110V	395nm ~ 405nm	AC 110V	3.1W	560mw	56pcs	120g

**2 Feet T8 UV LED Tube (Cap Base = G13, Color of Housing = White)**

P/N	$\lambda_p$	Input Voltage	Power Cons.	Output Power	LED Q'ty	Weight
400-2FUT-230V	395nm ~ 405nm	AC 230V	9.4W	1120mw	112pcs	180g
400-2FUT-110V	395nm ~ 405nm	AC 110V	7.0W	1120mw	112pcs	180g

**4 Feet T8 UV LED Tube (Cap Base = G13, Color of Housing = White)**

P/N	$\lambda_p$	Input Voltage	Power Cons.	Output Power	LED Q'ty	Weight
400-4FUT-230V	395nm ~ 405nm	AC 230V	22.3W	2240mw	224pcs	340g
400-4FUT-110V	395nm ~ 405nm	AC 110V	16.7W	2240mw	224pcs	340g


**Product Dimensions.**

Unit: mm


1f: 330

2f: 580

4f: 1200

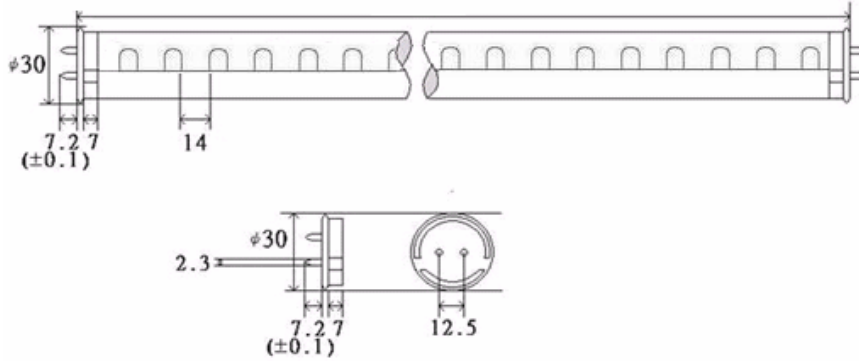

**Packing Information.**

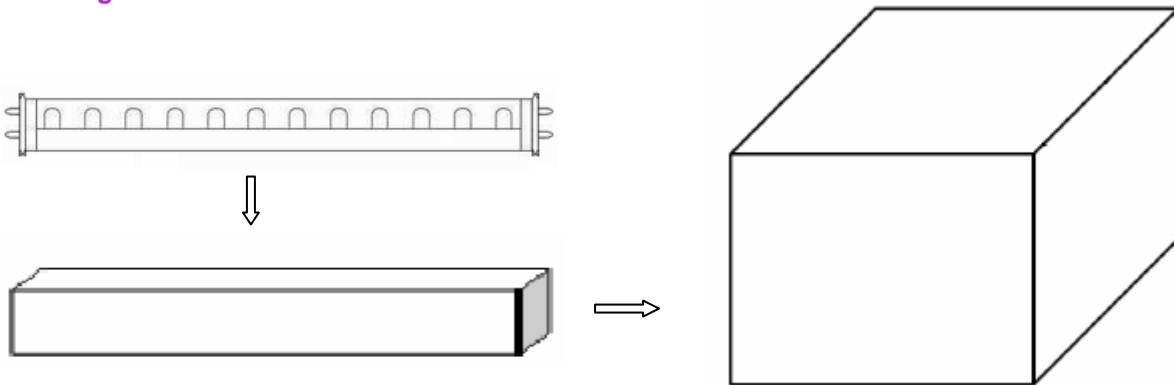

Pieces per Pack = 1 piece

Packs per Outer-Box = 40 (1 foot)

Packs per Outer-Box = 20 (2 feet)

Packs per Outer-Box = 10 (4 feet)

**Warning.**

UV LED light device, radiates intense UV light during operation.

Do not permit children or untrained personnel to operate this device.

Do not look directly into the UV light during operation of the device.

Exposure to UV light, even for a brief period, can damage your eyes.

During operation, the use of Ultra Violet protective goggles is recommended.


VioLED International Inc.

4F-2, No.427, Zhongshan N. Rd., Daya Dist., Taichung City 428, Taiwan.  
TEL:886-4-25692507 FAX: 886-4-25691977 <http://www.violed.com.tw>


**Installation.**

**Install in conventional light fixture:**

- Step 1: Remove conventional black light fluorescent tube from light fixture.
- Step 2: Remove the starter (see below figures, no need to remove ballast)
- Step 3: Install uv led tube at original location of conventional black light fluorescent tube.
- Step 4: Rotate the tube slightly and make illumination angle suitable.
- Step 5: Turn on the power

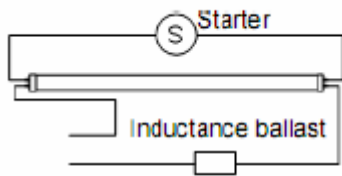

**Before**

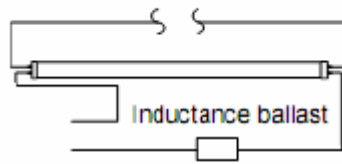

**After**



Original



Step 1 & 2



Step 3 & 4



Step 5